

Ordering Information Form

Notes:

1. RedLineIPS SmartPad is made from vinyl ester resin material, as manufactured by Cogbill Construction.
2. SmartPad is secured to the pipe using the RedLineIPS composite banding system (SmartBands).
3. Various thicknesses, angles of coverage, and lengths are based on the specific design parameters of the piping system.
4. Operating temperature range is -60°F (-51°C) to 400°F (204°C).
5. RedLineIPS SmartPads include a pre-installed RedLineIPS Hydroseal Gasket for sealing it to the pipe, offering a NEMA 4 watertight seal to prevent corrosion.
6. 50,000 lbs (22,680 kg) compressive strength.



RedLineIPS by Cogbill







2325 S. Main Street

Vidor, TX 77662 USA

(409) 748-1419

Sales@SmartPadSystem.com

www.SmartPadSystem.com

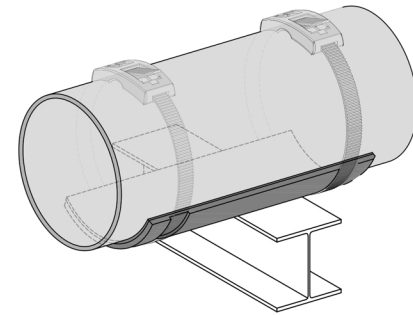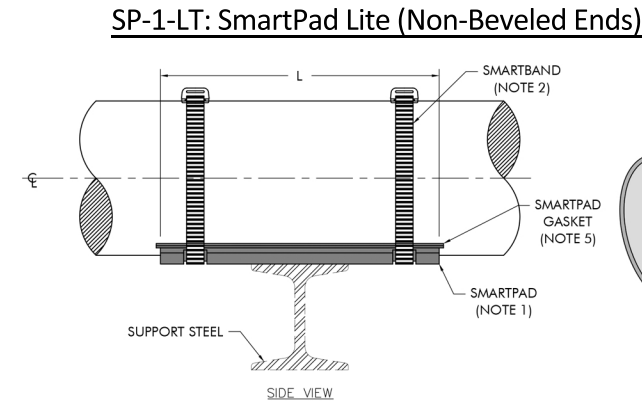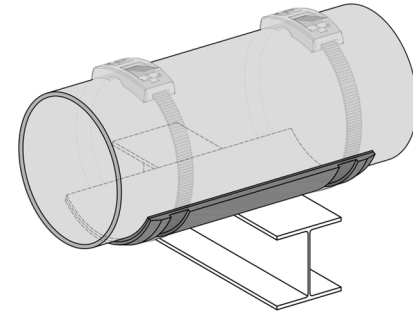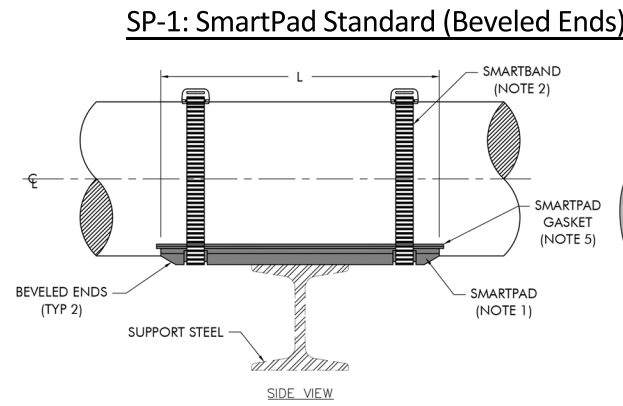

SmartPad (SP)	Pipe Size (NPS)	Pad Thickness (T)	Standard Angle (A)	Standard Length (L)
Standard or Lite	3/4" - 4"	1/2"	90°	12"
Standard or Lite	6" - 10"	1/2"	60°	12"
Standard or Lite	12" - 16"	1/2"	45°	12"
Standard or Lite	18" - 24"	1/2"	45°	18"
Other Sizes Available, Contact Cogbill for More Information				

(Circle One)

Get a Free Quote:

Fill in information and email this form to
Sales@SmartPadSystem.com

Leave field blank for standard dimensions.

For any questions, please contact us at
(409) 768-1419.

Hours of Operation

Monday - Friday

6:30am - 5:00pm CST

[illegible]